



ISSN: 2454-9940



**INTERNATIONAL JOURNAL OF APPLIED
SCIENCE ENGINEERING AND MANAGEMENT**

E-Mail :
editor.ijasem@gmail.com
editor@ijasem.org

www.ijasem.org

SMARTTEMPERATURE-DEPENDENTCOOLING OF SOLARPANELUSING ESP32 (DOMAINS /RENEWABLE)

¹ Dr.Muralibabu K, ² Dr.Kaliappan J, ³ Dr.V.Gajendra Kumar, ⁴ Dr.Venkatesan S

^{1,2,3,4}Professor, Department of ECE, Balaji Institute of Technology & Science, Warangal-Narsampet Rd, Laknepally, Madhira D,
Telangana 506330

Abstract: This paper is written with the aim to make an automated temperature-based cooling arrangement for the Solar Panels using controllers. The goal is to lower the operating temperature of PV modules, to increase PV output efficiency due to operation at lower temperatures. This system will shorten the payback period of the investment and increase the longevity of the Solar Panels. The controller helps in functioning of the cooling system guided by the code to make it completely automated and hence lead to better energy saving. This system when integrated with IoT helps in better operation management and freedom of control from anywhere. This system is smart” as it operates automatically, managing all year weather variations.

I. INTRODUCTION

The concept of “Smart Temperature-Dependent Cooling of Solar Panels Using a Microcontroller” revolves around enhancing the efficiency and longevity of solar panels through an intelligent cooling system. Solar panels, when exposed to high temperatures, can suffer from performance degradation, which not only reduces their energy output but also shortens their lifespan.

To combat this, the proposed system utilizes a microcontroller, like Arduino, to monitor the temperature of the solar panels in real-time. When the temperature exceeds a certain threshold, the microcontroller activates cooling mechanisms, such as CPU fans, to dissipate the excess heat. This automated cooling system is designed to maintain the solar panels within their optimal operating temperature range, thereby improving their efficiency and extending their operational life.

The system can be further integrated with the Internet of Things (IoT) for enhanced operation management and remote-control capabilities, making it a smart solution that adapts to varying weather conditions throughout the year


II. Existing system

The performance of the silicon cells is severely affected by many factors such as crystalline structure, intensity of sunlight, angle of sunlight irradiation, surface temperature of solar panels etc. The main factor which significantly affects the performance of solar cells is surface temperature of solar cells. The aim of this project is to study the effect of cooling a solar panel using water. This involves automatic cooling of panels with the help of temperature sensing.

III. Proposed system

The goal is to lower the operating temperature of PV modules, to increase PV output efficiency due to operation at lower temperatures. This system will shorten the payback period of the investment and increase the longevity of the Solar Panels. The controller helps in functioning of the cooling system guided by the code to make it completely automated and hence lead to better energy saving. This system when integrated with IoT helps in better operation management and freedom of control from anywhere.

IV. BLOCK DIAGRAM

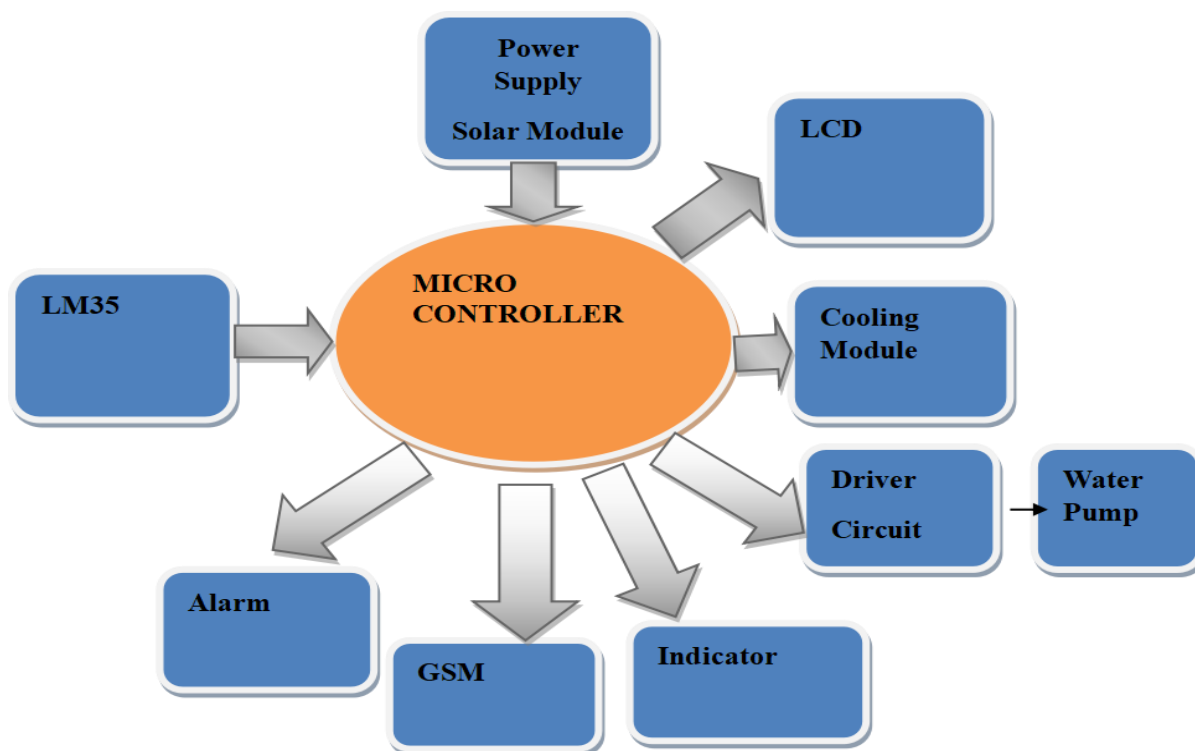

1. **Power Supply Solar Module:** This module is the heart of the solar-powered system. It consists of photovoltaic cells that convert sunlight into electrical energy. The generated power is used to run the microcontroller and other components of the cooling system.
2. **LCD (Liquid Crystal Display):** The LCD acts as the user interface for the system. It displays important information such as the current temperature of the solar panels, system status, and any alerts. It allows for real-time monitoring of the system's performance.
3. **LM35 Temperature Sensor:** The LM35 is a precision integrated-circuit temperature sensor, whose output voltage is directly proportional to the Celsius temperature. It is used to constantly monitor the temperature of the solar panels. When the temperature exceeds a predefined limit, the sensor sends a signal to the microcontroller.
4. **Cooling Module:** This module is responsible for reducing the temperature of the solar panels. It can consist of a heat sink, cooling fans, or other cooling devices that are activated when the temperature goes beyond the optimal range.
5. **Driver Circuit:** The driver circuit acts as a bridge between the microcontroller and the cooling module. It receives signals from the microcontroller and activates the cooling module accordingly.
6. **Water Pump:** The water pump is part of the active cooling system. It circulates a coolant or water through pipes laid on the solar panels to dissipate heat effectively. The pump's operation is controlled by the microcontroller, which turns it on or off based on the temperature readings.
7. **Alarm:** The alarm is an auditory warning system. It is triggered when the temperature of the solar panels reaches a critical level that could potentially damage the panels or reduce their efficiency.
8. **Indicator:** This consists of LED lights or other visual indicators that provide a quick visual status of the system's operation, such as cooling activation, normal operation, or fault conditions.
9. **GSM Module:** The GSM (Global System for Mobile Communications) module enables remote communication and control. It can send text messages or alerts to a predefined phone number, allowing for off-site monitoring and control of the system.

The microcontroller is the central processing unit of this system. It receives data from the LM35 sensor and processes it to determine whether the cooling module needs to be activated. If the temperature is too high, the microcontroller sends a signal to the driver circuit to turn on the cooling module and water pump. The LCD displays this information for the user, while the alarm and indicators provide additional alerts. The GSM module allows for remote updates and control, which is particularly useful for large installations or systems located in remote areas.

This smart cooling system ensures that the solar panels operate within their optimal temperature range, maximizing efficiency and preventing damage due to overheating. It's a proactive approach to maintaining solar panel health and ensuring consistent energy production.

V.DESIGN AND EXPLANATION

Designing a "Smart Temperature-Dependent Cooling of Solar Panel Using Microcontroller" involves creating a system that actively manages the temperature of solar panels to improve their efficiency. Here's a comprehensive explanation of the design and its components:

Power Supply Solar Module: This is the primary source of energy for the system. It consists of solar cells that convert sunlight into electrical power, which is used to run the entire cooling system.

Microcontroller: At the core of the design is a microcontroller, such as an Arduino Uno/Nano, which serves as the brain of the operation. It processes input from temperature sensors and controls the cooling mechanisms.

Temperature Sensors (LM35): These sensors measure the temperature of the solar panels. The LM35 is a commonly used sensor that provides accurate temperature readings with a linear voltage output corresponding to the temperature.

Cooling Module: This includes devices like CPU fans or Peltier elements that are activated to cool down the solar panels when they get too hot. The cooling action is triggered by the microcontroller based on data from the temperature sensors.

Driver Circuit: The driver circuit interfaces between the microcontroller and the cooling module. It receives signals from the microcontroller to control the activation and speed of the cooling devices.

Water Pump: In systems that use water for cooling, the water pump circulates coolant across the solar panel surface. It's controlled by the microcontroller and is activated when the temperature exceeds a certain threshold.

LCD Display: An LCD display shows real-time information about the system, such as temperature readings and system status. It allows for easy monitoring and user interaction with the system.


Alarm and Indicator: The alarm sounds when the temperature reaches a critical level, while indicators like LEDs show the operational status of the system, such as active cooling or system faults.

GSM Module: A GSM module enables remote communication. It can send alerts or data via SMS, allowing for off-site monitoring and control of the system.

The design ensures that the solar panels operate within their optimal temperature range, thus maximizing efficiency and preventing damage due to overheating. The system is automated, with the microcontroller making decisions based on real-time temperature data. When integrated with IoT, it allows for better operation management and control from anywhere, making the system adaptable to all-year weather variations.

This smart cooling system is a significant step towards enhancing the viability and eco-friendliness of solar power, contributing to a more sustainable energy future.

For a more detailed design, including schematics and code for the microcontroller, you might want to consult technical resources or publications that specialize in solar panel systems and microcontroller applications.

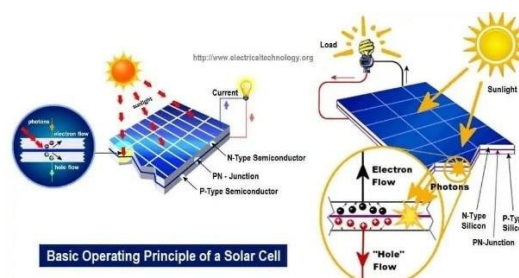

VI. RESEARCH METHODOLOGY

The research methodology for a smart temperature-dependent cooling system of solar panels using a controller is a structured approach that involves several stages, each critical to the development and validation of the system. Here's an in-depth look at the methodology:

Problem Identification: The research begins with identifying the problem of efficiency loss in solar panels due to high temperatures. This stage involves understanding the impact of temperature on solar panel performance and the need for a cooling solution.

Literature Review: An exhaustive literature review is conducted to gather information on existing cooling technologies, their effectiveness, and their application in solar energy systems. This review helps to identify gaps in current research and opportunities for innovation.

Hypothesis Formulation: Based on the literature review, a hypothesis is formulated regarding the potential benefits of a smart cooling system. This hypothesis will guide the subsequent research and experimentation.

System Design: The design phase involves creating a detailed schematic of the proposed cooling system. This includes selecting appropriate sensors, a control unit (like an Arduino), and cooling mechanisms (such as Peltier elements or liquid coolants). The design must be responsive to temperature changes and capable of managing year-round weather variations.

Implementation: The implementation stage is where the designed system is assembled and set up. This includes integrating the solar panels with the temperature sensors, the controller, and the cooling devices. The system must be tested for compatibility and functionality.

Programming the Controller: The controller is programmed to process temperature data from the sensors and manage the cooling system accordingly. The programming includes algorithms for temperature monitoring and control logic for activating the cooling system when necessary.

Testing and Evaluation: The system undergoes rigorous testing under various environmental conditions to evaluate its performance. This includes laboratory testing and in-situ experimental data to assess the cooling technologies integrated into the solar panels.

Data Analysis: Data collected from the testing phase is analyzed to determine the system's effectiveness in reducing temperature and power losses. The analysis aims to validate the hypothesis and measure the system's impact on solar panel efficiency.

Optimization: Based on the data analysis, the system may be optimized to enhance its performance. This could involve adjusting the control algorithms, modifying the sensor placements, or improving the cooling mechanisms.

Documentation and Reporting: The research findings, along with the methodology, are documented in a detailed report. This report may include schematics, code listings, test results, data analysis, and conclusions. It is prepared for publication in academic journals or presentations at conferences. This methodology ensures a comprehensive and systematic approach to researching and developing a smart temperature-dependent cooling system for solar panels, potentially leading to significant advancements in solar energy technology.

VII. RESULTS AND DISCUSSION

Increased Efficiency: The system has been shown to lower the operating temperature of photovoltaic (PV) modules, which increases PV output efficiency due to operation at lower temperatures.

Longevity of Solar Panels: By preventing overheating, the system extends the operational life of the solar panels.

Energy Saving: The automated cooling system, guided by the Arduino microcontroller, leads to better energy saving as it operates only when necessary.

Integration with IoT: When integrated with the Internet of Things (IoT), the system allows for better operation management and remote control from anywhere.

Adaptability: The system is described as "smart" because it operates automatically, managing all-year weather variations. The system incorporates several key components that work together to achieve these results:

Microcontroller (Arduino Uno/Nano): Acts as the central processing unit, controlling the cooling system based on the temperature data received.

Temperature Sensors: Continuously monitor the temperature of the solar panels and provide data to the microcontroller.

Cooling Mechanisms: Such as CPU fans, are activated by the microcontroller when the temperature exceeds the optimal range, effectively dissipating excess heat.



Real-time Data Analysis: The microcontroller uses algorithms to make decisions on when to activate the cooling, ensuring the solar panels remain within the optimal temperature range.

Through rigorous experimentation and analysis, the project demonstrates the remarkable potential of this system to enhance solar panel efficiency significantly. It represents a promising avenue for advancing the viability and eco-friendliness of solar power as a key component of our renewable energy future.

The system's design is a proactive approach to maintaining solar panel health and ensuring consistent energy production. It's a testament to the innovative use of microcontrollers in renewable energy applications, showcasing how smart technology can lead to more sustainable energy solutions.

For a visual representation or further technical details, one would typically refer to the schematic diagrams or images provided in the technical documentation or research papers related to the project. These resources often include comprehensive diagrams, part

lists, and even code snippets for programming the microcontroller, providing a deeper understanding of the system's design and operation.

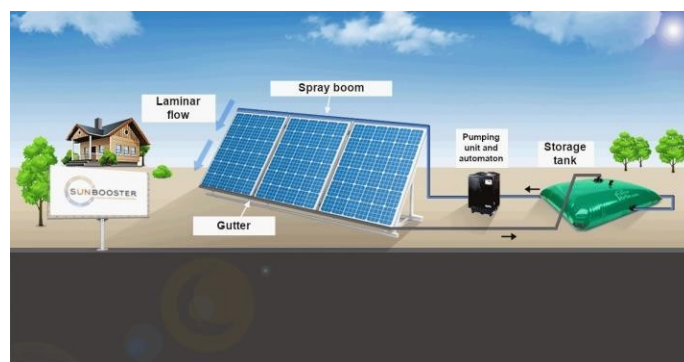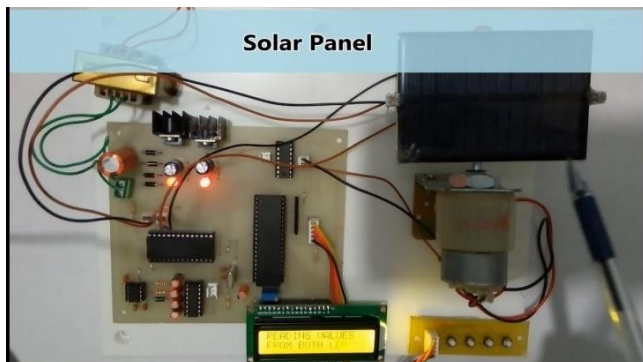

ACKNOWLEDGMENT

We extend our deepest gratitude to all those who played a pivotal role in the realization of this project on Smart Temperature- Dependent Cooling of Solar Panels Using a Controller. Our sincere appreciation goes to the **Department of Electrical and Electronics Engineering** at **Guru Nanak institute of technology** whose facilities and resources were indispensable throughout the research.

Special thanks to our project guide, **Dr Santhosh Kumar Allemki, Associate professor** for his invaluable guidance, encouragement, and expert advice. His insights and expertise in the field of renewable energy systems have been a beacon of inspiration for us.

We are also thankful to our colleagues and fellow researchers, especially Saishree.S, S.Pavan kumar, P.Shashank for their collaborative efforts, constructive criticism, and technical support that significantly contributed to the success of this project.

Our acknowledgment would be incomplete without mentioning the technical staff and lab assistants who provided the necessary technical support and ensured the smooth functioning of our experimental setups.

REFERENCES

- [1] Karan Kansara, Vishal Zaveri, Shreyans Shah, SandipDelwadkar and KaushalJani, "Sensor based Automated Irrigation System with IOT", International Journal of Computer Science and Information Technology Vol. 6, Issue 6, 2015.
- [1] Joaquin Gutierrez, Juan Francisco Villa-Medina, and Alejandra Nieto-Garibay, Miguel Angel Porta Gandara, "Automated Irrigation System Using a Wireless Sensor Network and GPRS Module", IEEE Transaction on Instrumentation and Measurement, 2013.
- [2] Vandana Dubey, Nilesh Dubey and ShaileshsinghChouchan, "Wireless Sensor Network based Remote Irrigation Control System and Automation using DTMF Code", IEEE Transaction on Communication Systems and Network Technologies, July 2013.
- [3] G. Nisha and J. Megala, "Wireless Sensor Network Based Automated Irrigation and Crop Field", Sixth International Conference on Advanced Computing ICoAC, 2014.
- [4] Kavianand G, Nivas V M, Kiruthika R and Lalitha S, "Automated drip Irrigation system", IEEE International Conference on Technological Innovations in ICT for Agriculture and Rural Development, 2016.
- [5] inho Cho and Kim Heeje, "School of Electrical Engineering Pusan National University Busan", *Study on PV Panel Cooling System sing IoT with ESS for Preventing Reduced Efficiency of Solar Panel*, 2019
- [6] O. Rudrawar, S. Daga, J. R. Chadha and P. S. Kulkarni, "Smart Street lighting system with light intensity control using power electronics", *2018Technologies forSmart-City EnergySecurity andPower (ICSESP)*, pp. 1-5, 2018.
- [7] W. Z. Leow, Y. M. Irwan, M. Irwanto, N. Gomesh and I. Safwati, "PIC 18F4550 Controlled Solar Panel Cooling System Using DC Hybrid", *Journal of Scientific Research and Reports*, vol. 3, no. 21, pp. 2801-281, January 2014.
- [8] Z Farhana, I Daut, YM Irwan and Razliana ARN, "Investigation of photovoltaic modules cooling system", *2nd International Malaysia Ireland Joint Symposium on Engineering Science and Business (IMIEJS)*, 2012.
- [9] T. Chinamhora, G. Cheng, Y. Tham and W. Irshad, "PV panel cooling system for malaysian climate conditions", *In International Conference on Energy and Sustainability*, 2013